



THROTTLE CABLE

Flex Technologies is Bringing the Technology Back to the Cable Industry

Industries First High Strength Plastic Throttle Cable Design

Durable Design

Operational load in throttle range designed at 5.0 lbs

Load to exit detent is 8.0 lbs

10,000 + cycles of environmental testing

Swinging arm of conduit allows wire to not kink

Cost Effective

Unique plastic bracket/hangar
Design reduces weight of the assembly

Integrated mounting nuts
save labor & time at OEM

Efficiency

Conduit is not "Hard Mounted" to mounting bracket and can swing through the arc of the wire during cycling


Compatibility

Designed as a drop in replacement part with mounting holes 2" OC

Mounting bracket is available for both RH/LH panel mounts

Designed for conduit to exit from 3 positions- 180°, 90° and 45°

Handles-Design per OEM Specifications or one of four economical production designs

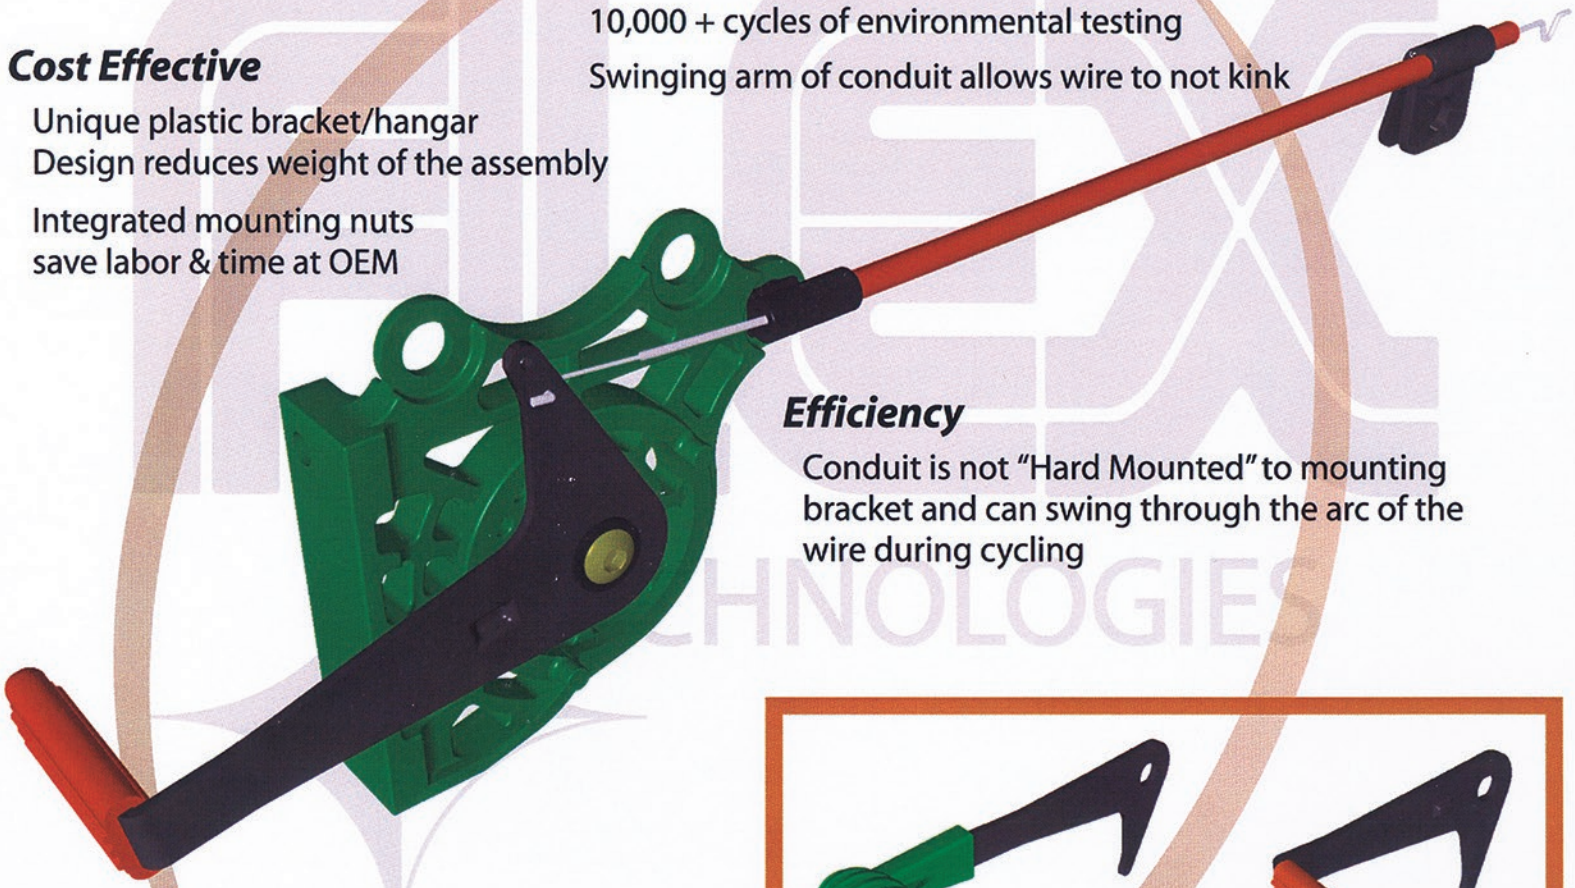

Throttle Cable Handle Designs

Handles available per OEM specifications